


三片式内螺纹球阀
3PC BALL VALVE THRED END&BUTT WELD END

DAGO

- 防爆阀杆/全口径BLOW-OUT PROOF STEM/FULL PORT
- 适用温度范围TEMPERATURE RANGE:-20 to 280°C
- 使用压力PRESSURE:PN63/1000WOG
- 适用介质APPLICABLE MEDIA:水WATER、气GAS、油OIL
- 设计制造DESIGN:GB/T-12224/ANSI B16.34
- 螺纹标准THREAD:BSPT/BSP/NPT/DIN/JIS/RC/G
- 检查与测试TEST:GB/T-13927/API598
- 气压测试AIR TEST:0.8MPA

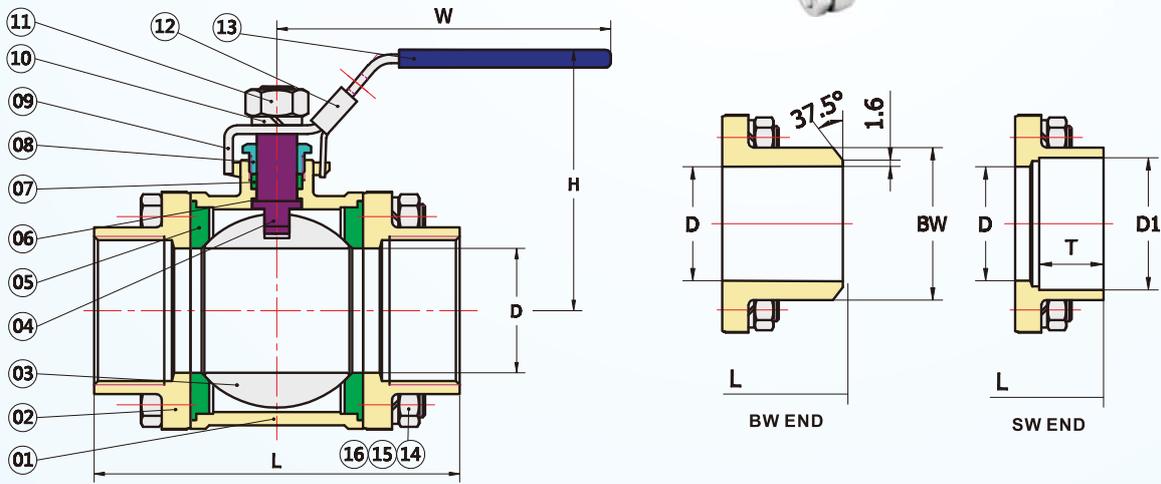


外形尺寸 OUTER SIZE

Unit:mm

SIZE	L	L2(M3)	D1	T	BW	H	E
1/4"	65	55	14.1	10	26.5	56.5	99
3/8"	65	60	17.6	10	26.5	56.5	99
1/2"	73	63	21.8	10	26.5	58	102
3/4"	83	72	27.5	13	33	60	116
1"	88	82	34.7	13	39.7	74	145
1-1/4"	98	95	43	13	49	75	156
1-1/2"	115	104	49	13	54	93	172
2"	140	122	61.5	16	66.7	106	174
2-1/2"	180	160	77	16	84.5	119	213
3"	205	180	90	16	97	133	255
4"	255	215	115.2	19	127.5	170	255

三片式内螺纹球阀
3PC BALL VALVE THRED END&BUTT WELD END

DAGO

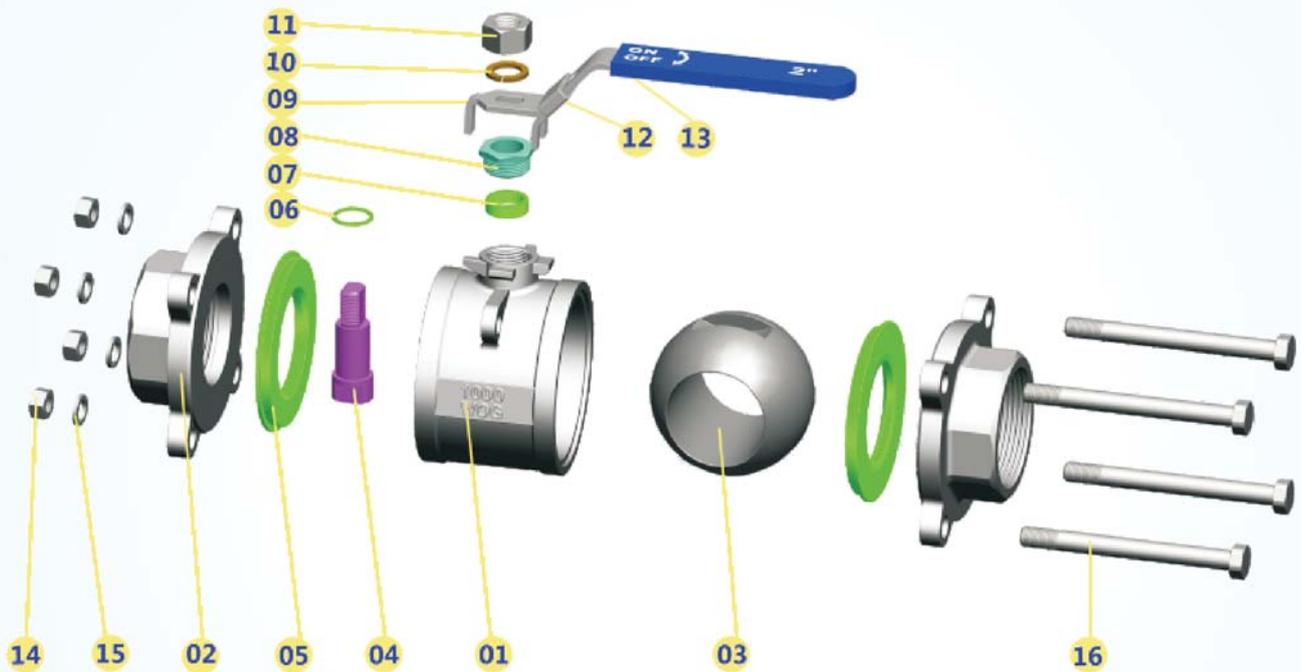



材质清单 MATERIALS LIST

NO.	零件名称 PART NAME	材质 MATERIALS LIST		
1	阀体 BODY	CF8M	CF8	WCB
2	阀盖 END CAP	CF8M	CF8	WCB
3	球 BALL	SS316	SS304	SS304
4	阀杆 STEM	SS316	SS304	SS304
5	阀座 SEAL	RTFE	RTFE	RTFE
6	杆密封 THRUST WASHER	PTFE	PTFE	PTFE
7	中头垫 STEM PACKING	PTFE	PTFE	PTFE
8	填料压套 GLAND	SS304	SS304	SS304
9	手柄 HANDLE	SS304	SS304	SS304
10	弹垫 STOD	SS304	SS304	SS304
11	螺帽 HANDLE NUT	SS304	SS304	SS304
12	锁片 LOCKING PAD	SS304	SS304	SS304
13	胶套 HANDLE COVER	PLASTIC	PLASTIC	PLASTIC
14	螺母 NUT	SS304	SS304	SS304
15	弹垫 STUD	A193 Gr.B8	A193 GR.B8	A193 Gr.B8
16	螺栓 BOLT	A194.Gr.8	A194.GR.8	A194.Gr.8

三片式快装球阀
3PC CLAMPED-PACKAGE BALL VALVE

DAGO

- 防爆阀杆/全口径BLOW-OUT PROOF STEM/FULL PORT
- 适用温度范围 TEMPERATURE RANGE: -20 to 280°C
- 使用压力 PRESSURE: PN63/1000WOG
- 适用介质 APPLICABLE MEDIA: 水WATER、气GAS、油OIL
- 设计制造 DESIGN: GB/T-12224/ANSI B16.34
- 螺纹标准 THREAD: BSPT/BSP/NPT/DIN/JIS/RC/G
- 检查与测试 TEST: GB/T-13927/API598
- 气压测试 AIR TEST: 0.8MPA

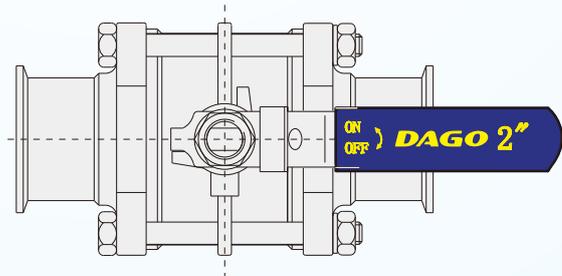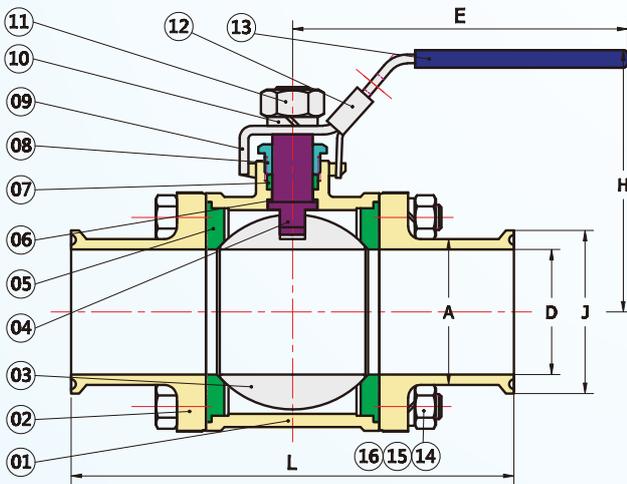

材质清单 MATERIALS LIST

NO.	零件名称 PART NAME	材质 MATERIALS LIST	
1	阀体 BODY	CF8M	CF8
2	阀盖 END CAP	CF8M	CF8
3	球 BALL	SS316	SS304
4	阀杆 STEM	SS316	SS304
5	阀座 SEAL	RTFE	RTFE
6	杆密封 THRUST WASHER	PTFE	PTFE
7	中头垫 STEM PACKING	PTFE	PTFE
8	填料压套 GLAND	SS304	SS304
9	手柄 HANDLE	SS304	SS304
10	弹垫 STOD	SS304	SS304
11	螺帽 HANDLE NUT	SS304	SS304
12	锁片 LOCKING PAD	SS304	SS304
13	胶套 HANDLE COVER	PLASTIC	PLASTIC
14	螺母 NUT	SS304	SS304
15	弹垫 STUD	A193 Gr.B8	A193 Gr.B8
16	螺栓 BOLT	A194.Gr.8	A194.Gr.8

外形尺寸 OUTER SIZE


Unit:mm

SIZE	L	A	D	t	J	M	H	E
1/2"	85.9	12.70	9.40	1.65	25.4	16.7	58.0	122.9
3/4"	97.5	19.05	15.75	1.65	25.4	27.5	61.0	122.9
1"	108.2	25.50	22.20	1.65	50.4	28.6	68.0	144.9
1 1/2"	135.8	38.20	34.90	1.65	50.4	31.4	84.5	188.9
2"	154.7	50.80	47.50	1.65	63.9	34.0	93.2	188.9
2 1/2"	168.5	63.60	60.30	1.65	77.5	28.0	131.8	255.3
3"	196.2	76.30	73.00	1.65	90.9	31.6	140.0	260.8
4"	232.5	101.60	94.40	2.10	118.9	34.0	173.6	322.2

三片式带接管焊接球阀 3PC WELDED BALL VALVE WITH CONNECTION PIPE

DAGO

- 防爆中轴/全流BLOW-OUT PROOF STEM/FULL PORT
- 适用温度范围TEMPERATURE RANGE:-20 to 150°C
- 使用压力PRESSURE:PN63/1000WOG
- 设计制造DESIGN:GB/T-12237/ANSI B16.34
- 尺寸参照FLANGE DIMENSIONS:GB/ T-9113.1
/ASME B16.5 CLASS 150
- 长度FACE TO FACE:GB/T-12221/ASMW B16.1
- 螺纹标准THREAD:BSPT/BSP/NPT/DIN/JIS/RC/G
- 检查与测试TEST:GB/T-13927/API598

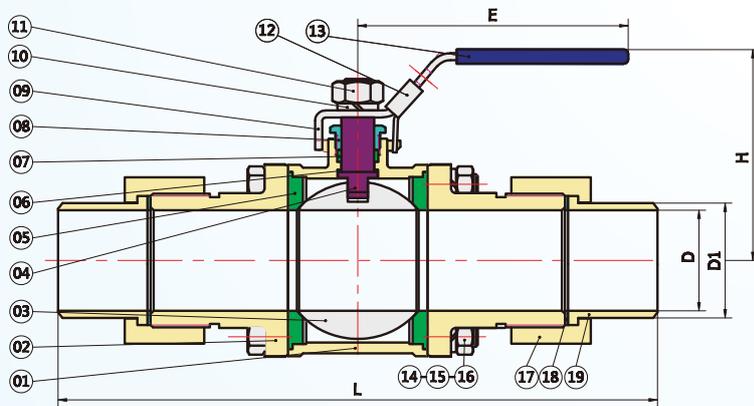

材质清单 MATERIALS LIST

NO.	零件名称 PART NAME	材质 MATERIALS LIST
1	阀体 BODY	CF8M CF8
2	阀盖 END CAP	CF8M CF8
3	球 BALL	SS316 SS304
4	阀杆 STEM	SS316 SS304
5	阀座 SEAL	RTFE RTFE
6	杆密封 THRUST WASHER	PTFE PTFE
7	中头垫 STEM PACKING	PTFE PTFE
8	填料压套 GLAND	SS304 SS304
9	手柄 HANDLE	SS304 SS304
10	弹垫 STOP	SS304 SS304
11	螺帽 HANDLE NUT	SS304 SS304
12	锁片 LOCKING PAD	SS304 SS304
13	胶套 HANDLE COVER	PLASTIC PLASTIC
14	接管螺母 CAP NUT	SS304 SS304
15	接管 CAP	SS304 SS304
16	接管垫片 CAP SEAL	PTFE PTFE
17	螺母 NUT	SS304 SS304
18	弹垫 STUD	A193 Gr.B8 A193 Gr.B8
19	螺栓 BOLT	A194.Gr.8 A194.Gr.8

外形尺寸 OUTER SIZE


Unit:mm

SIZE	L	D	D1	H	E
1/4"	140	11.5	14	57	95
3/8"	160	12.5	18	57	95
1/2"	180	15	22	68	110
3/4"	200	20	28	70	125
1"	218	25	34	80	125
1-1/4"	235	32	42	85	135
1-1/2"	260	38	46	95	155
2"	300	50	60	105	155

三片式加长对焊球阀
3PC BALL VELE LONG BUTT WELD

DAGO

- 防爆阀杆/全通径BLOW-OUT PROOF STEM/FULL PORT
- 适用温度范围TEMPERATURE RANGE:-20 to 280°C
- 使用压力PRESSURE:PN63/1000WOG
- 适用介质APPLICABLE MEDIA:水WATER、气GAS、油OIL
- 设计制造DESIGN:GB/T-12224/ANSI B16.34
- 螺纹标准THREAD:BSPT/BSP/NPT/DIN/JIS/RC/G
- 检查与测试TEST:GB/T-13927/API598
- 气压测试AIR TEST:0.8MPA

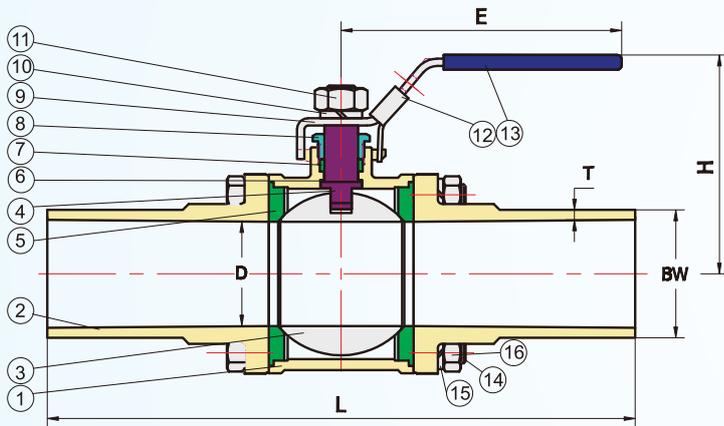

材质清单 MATERIALS LIST

NO.	零件名称 PART NAME	材质 MATERIALS LIST	
1	阀体 BODY	CF8M	CF8
2	阀盖 END CAP	CF8M	CF8
3	球 BALL	316	304
4	阀杆 STEM	316	304
5	球密封 SEAT	PTFE	PTFE
6	杆密封 THRUST WASHER	PTFE	PTFE
7	中头垫 STEM PACKING	PTFE	PTFE
8	填料压套 GLAND	304	304
9	手柄 HANDLE	SS	SS
10	弹垫 STOD	304	304
11	螺帽 HANDLE NUT	304	304
12	锁片 LOCKING PAD	SS	SS
13	胶套 HANDLE COVER	PLASTIC	PLASTIC
14	螺母 NUT	304	304
15	弹垫 STOD	304	304
16	螺帽 HANDLE NUT	304	304

外形尺寸 OUTER SIZE


Unit:mm

SIZE	BW	L	E	H	D	T
DN15 1/2"	10.2	135	122.9	58.0	12.70	1.24
DN20 3/4"	15.8	135	122.9	61.0	19.05	1.65
DN25 1"	22.1	152	144.9	68.0	25.40	1.65
DN32 1-1/4"	28.5	157	144.9	73.5	31.80	1.65
DN40 1-1/2"	34.8	190	188.9	84.5	38.10	1.65
DN50 2"	47.5	204	188.9	93.2	50.80	1.65
DN65 2-1/2"	60.2	254	255.3	131.8	63.50	1.65
DN80 3"	72.9	280	260.8	140.0	76.20	1.65
DN100 4"	97.4	306	322.2	173.6	101.6	1.65

三片式卫生级短对焊球阀 3PC BALL VALVE SHORT WELD END

DAGO

- 防爆阀杆/全口径BLOW-OUT PROOF STEM/FULL PORT
- 适用温度范围TEMPERATURE RANGE:-20 to 280°C
- 使用压力PRESSURE:PN63/1000WOG
- 适用介质APPLICABLE MEDIA:水WATER、气GAS、油OIL
- 设计制造DESIGN: GB/T-12224/ANSI B16.34
- 螺纹标准THREAD: BSPT/BSP/NPT/DIN/JIS/RC/G
- 检查与测试TEST: GB/T-13927/API598
- 气压测试AIR TEST: 0.8MPA

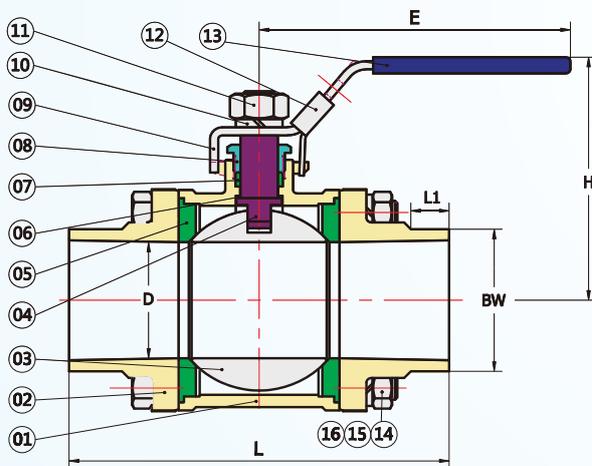

材质清单 MATERIALS LIST

NO.	零件名称 PART NAME	材质 MATERIALS LIST	材质 MATERIALS LIST
1	阀体 BODY	CF8M	CF8
2	阀盖 END CAP	CF8M	CF8
3	球 BALL	316	304
4	阀杆 STEM	316	304
5	球密封 SEAT	PTFE	PTFE
6	杆密封 THRUST WASHER	PTFE	PTFE
7	中头垫 STEM PACKING	PTFE	PTFE
8	填料压套 GLAND	304	304
9	手柄 HANDLE	SS	SS
10	弹垫 STOD	304	304
11	螺帽 HANDLE NUT	304	304
12	锁片 LOCKING PAD	SS	SS
13	胶套 HANDLE COVER	PLASTIC	PLASTIC
14	螺母 NUT	304	304
15	弹垫 STOD	304	304
16	螺帽 HANDLE NUT	304	304

外形尺寸 OUTER SIZE


Unit:mm

SIZE	L	L1	E	H	D	BW
DN15 1/2"	82.5	20.0	122.9	58.0	10.2	12.7
DN20 3/4"	87.5	20.0	122.9	61.0	15.8	19.1
DN25 1"	96.0	20.0	144.9	68.0	22.1	25.4
DN40 1-1/2"	118.0	20.0	188.9	84.5	34.8	38.2
DN50 2"	131.7	20.0	188.9	93.2	47.5	50.8
DN65 2-1/2"	158.5	20.0	255.3	131.8	60.2	63.4
DN80 3"	178.8	20.0	260.8	140.0	72.9	76.2
DN100 4"	210.5	20.0	322.2	173.6	97.4	101.6

三片式高平台内螺纹球阀 3PC BALL VALVE MOUNING PAD THREAD END

DAGO

- 防爆阀杆/全口径BLOW-OUT PROOF STEM/FULL PORT
- 适用温度范围TEMPERATURE RANGE:-20 to 280°C
- 使用压力PRESSURE:PN63/1000WOG
- 适用介质APPLICABLE MEDIA:水WATER、气GAS、油OIL
- 设计制造DESIGN:GB/T-12224/ANSI B16.34
- 螺纹标准THREAD:BSPT/BSP/NPT/DIN/JIS/RC/G
- 检查与测试TEST:GB/T-13927/API598
- 气压测试AIR TEST:0.8MPA

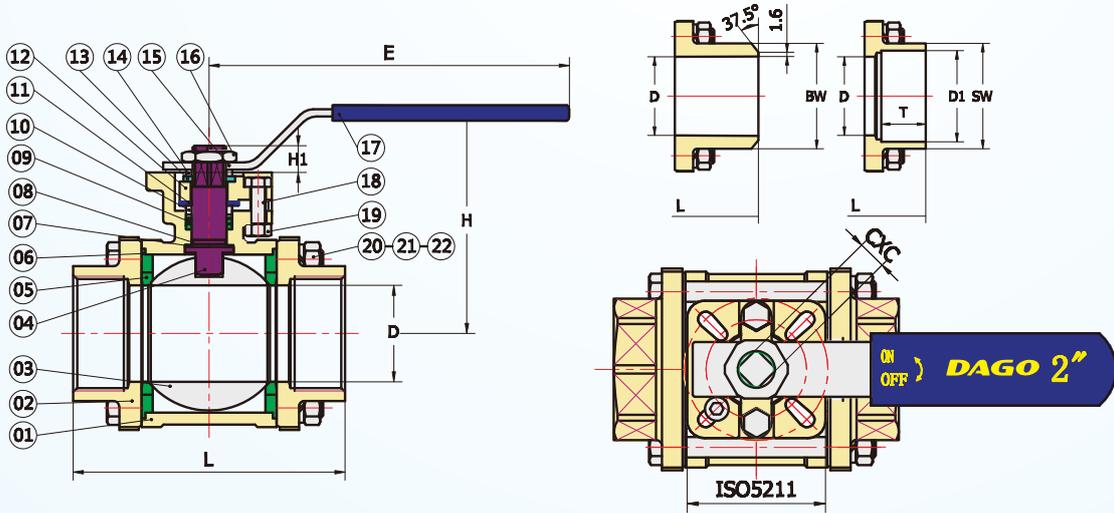

材质清单 MATERIALS LIST

NO.	零件名称 PART NAME	材质 MATERIALS LIST	材质 MATERIALS LIST
1	阀体 BODY	CF8M	CF8
2	阀盖 END CAP	CF8M	CF8
3	球 BALL	SS316	SS304
4	阀杆 STEM	SS316	SS304
5	阀座 SEAL	RTFE	RTFE
6	线条 BODY SEAL	PTFE	PTFE
7	杆密封 THRUST WASHER	PTFE	PTFE
8	O型圈 STEM O-RING	VITON	VITON
9	中头垫 STEM PACKING	PTFE	PTFE
10	填料压套 GLAND	SS304	SS304
11	碟簧 BELLEVILLE WASHER	SS304	SS304
12	填料压套 GLAND	SS304	SS304
13	定位片 STOP WASHER	SS304	SS304
14	金属垫 WASHER	SS304	SS304
15	手柄 HANDLE	SS304	SS304
16	螺帽 HANDLE NUT	SS304	SS304
17	胶套 HANDLE COVER	PLASTIC	PLASTIC
18	螺栓 BOLT	SS304	SS304
19	螺母 NUT	SS304	SS304
20	螺母 NUT	SS304	SS304
21	弹垫 STUD	SS304	SS304
22	螺栓 BOLT	SS304	SS304

外形尺寸 OUTER SIZE

Unit:mm

SIZE	L2(M3)	D1	T	BW	H	E	H1	C
1/4"	55	14.1	10	26.5	63	99	8	9
3/8"	60	17.6	10	26.5	63	99	8	9
1/2"	75	21.8	10	26.5	70	102	8.5	9
3/4"	80	27.5	13	33	80	116	9	9
1"	90	34.7	13	39.7	90	145	11	11
1-1/4"	110	43	13	49	95	156	11	11
1-1/2"	120	49	13	54	105	172	14	14
2"	140	61.5	16	66.7	112	174	14	14
2-1/2"	185	77	16	84.5	174	213	16	17
3"	205	90	16	97	185	255	16	17
4"	240	115.2	19	127.5	205	255	16.5	19

D-3FD GB-PN16/40(国标法兰)

- 防爆阀杆/全通径 BLOW-OUT PROOF STEM/FULL PORT
- ISO 5211平台直接安装 ISO 5211 DIRECT MOUNTING PAD
- 适用温度范围 TEMPERATURE RANGE: -20 to 180°C
- 设计制造 DESIGN: GB/T-12237
- 法兰尺寸参照 FLANGE DIMENSIONS: GB/ T-9113.1
- 法兰长度 FACE TO FACE: GB/T-12221
- 检查与测试 TEST: GB/T-13927

D-3FD CLASS 150/300#



- 防爆中轴/全流 BLOW-OUT PROOF STEM/FULL PORT
- ISO 5211平台直接安装 ISO 5211 DIRECT MOUNTING PAD
- 适用温度范围 TEMPERATURE RANGE: -20 to 180°C
- 设计制造 DESIGN: ANSI B16.34
- 法兰尺寸参照 FLANGE DIMENSIONS: ASME B16.5 CLASS150
- 法兰长度 FACE TO FACE: ASME B16.1
- 检查与测试 TEST: API-598
Pressure test: API598


D-2FD JIS-10K

- 防爆阀杆/全通径 BLOW-OUT PROOF STEM/FULL PORT
- ISO 5211平台直接安装 ISO 5211 DIRECT MOUNTING PAD
- 适用温度范围 TEMPERATURE RANGE: -20 to 180°C
- 设计制造 DESIGN: ANSI B16.34
- 法兰尺寸参照 FLANGE DIMENSIONS: JIS B2238 10K
- 法兰长度 FACE TO FACE: JIS B2002(ASME B16.1)
- 检查与测试 TEST: API-598

D-3FD DIN PN16/40

- 防爆中轴/全流 BLOW-OUT PROOF STEM/FULL PORT
- ISO 5211平台直接安装 ISO 5211 DIRECT MOUNTING PAD
- 适用温度范围 TEMPERATURE RANGE: -20 to 180°C
- 设计制造 DESIGN: EN12516-1
- 法兰尺寸参照 FLANGE DIMENSIONS:
EN 1092-1 TYPE 21 PN16/40(RF SF)
- 法兰长度 FACE TO FACE: EN 558-1F4/F5(DIN 3202 F4/F5)
- 检查与测试 TEST: EN-12266-1

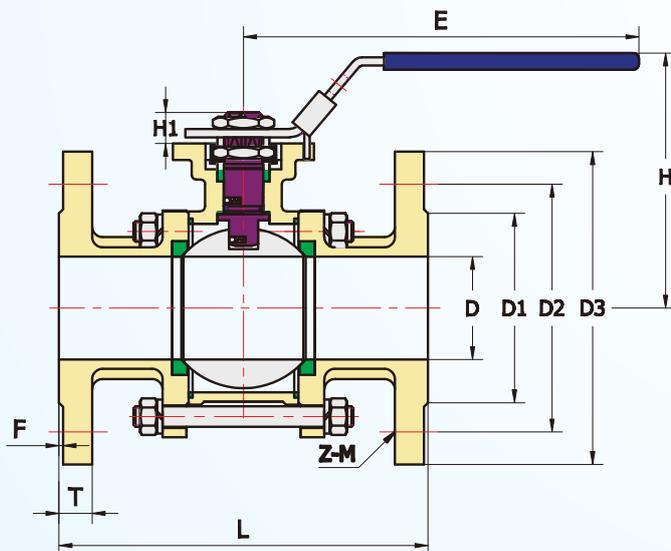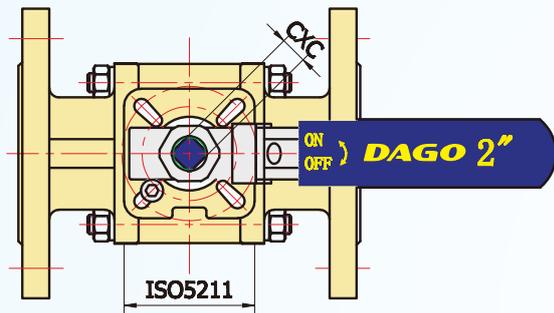

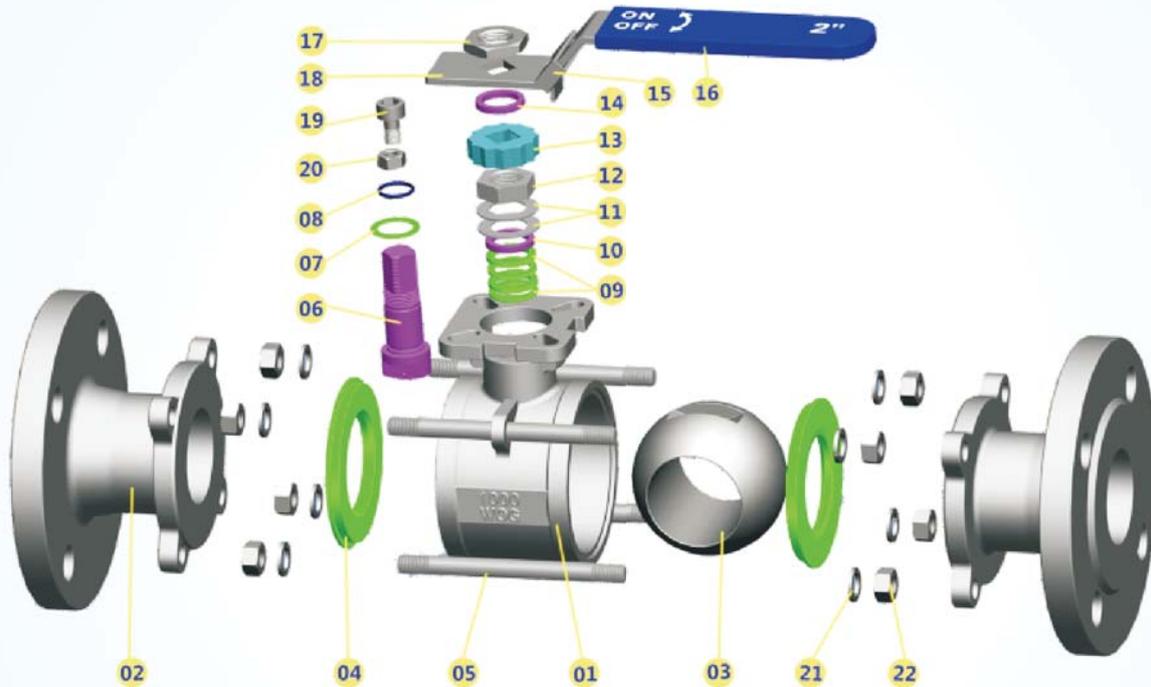

材质清单 MATERIALS LIST

NO.	零件名称 PART NAME	PN16/40		CLASS150/300		JIS-10K	DIN PN40
1	阀体 BODY	CF8M	CF8	CF8M	WCB	SCS13	1.4408
2	阀盖 END CAP	CF8M	CF8	CF8M	WCB	SCS13	1.4408
3	球 BALL	SS316	SS304	SS316	SS304	SS304	SS316
4	阀座 SEAL	RTFE	RTFE	RTFE	RTFE	RTFE	RTFE
5	螺栓 STUD	PTFE	PTFE	PTFE	PTFE	PTFE	PTFE
6	阀杆 STEM	SS316	SS304	SS316	SS304	SS304	SS316
7	杆密封 THRUST WASHER	PTFE	PTFE	PTFE	PTFE	PTFE	PTFE
8	O型圈 STEM O-RING	VITON	VITON	VITON	VITON	VITON	VITON
9	中头垫 STEM PACKING	PTFE	PTFE	PTFE	PTFE	PTFE	PTFE
10	填料压套 GLAND	SS304	SS304	SS304	SS304	SS304	SS304
11	碟簧 BELLEVILLE WASHER	SS304	SS304	SS304	SS304	SS304	SS304
12	下螺帽 STEM NUT	SS304	SS304	SS304	SS304	SS304	SS304
13	防松盖 STOP WASHER	SS304	SS304	SS304	SS304	SS304	SS304
14	垫片压簧 FILLING DAMPING RING	SS304	SS304	SS304	SS304	SS304	SS304
15	锁片 LOCKING PAD	SS304	SS304	SS304	SS304	SS304	SS304
16	胶套 HANDLE COVER	PLASTIC	PLASTIC	PLASTIC	PLASTIC	PLASTIC	PLASTIC
17	螺帽 HANDLE NUT	SS304	SS304	SS304	SS304	SS304	SS304
18	手柄 HANDLE	SS304	SS304	SS304	SS304	SS304	SS304
19	定位螺丝 STOP BOIT	SS304	SS304	SS304	SS304	SS304	SS304
20	定位螺帽 STOP NUT	SS304	SS304	SS304	SS304	SS304	SS304
21	弹垫 STUD	A193 Gr.B8	A193 Gr.B8	A193 Gr.B8	A193 Gr.B8	A193 Gr.B8	A193 Gr.B8
22	螺帽 NUT	A194.Gr.8	A194.Gr.8	A194.Gr.8	A194.Gr.8	A194 Gr.8	A194.Gr.8

尺寸表 DIMENSIONS

GB(国标法兰) DN15-DN50 PN16/40, DN65-DN100 PN16

Unit:mm

SIZE	D	L	E	H	H1	C	D1	D2	D3	T	F	M-N	ISO5211
DN15 1/2"	15	130	112	48	9	9	46	65	95	14	2	4-14	F03/F04
DN20 3/4"	20	140	112	62	9	9	56	75	105	14	2	4-14	F03/F04
DN25 1"	25	150	136	64	11	11	65	85	115	14	2	4-14	F04/F05
DN32 1-1/4"	32	165	185	71	11	11	78	100	135	16	2	4-18	F04/F05
DN40 1-1/2"	38	180	198	76	14	14	84	110	145	16	2	4-18	F05/F07
DN50 2"	50	200	198	84.5	14	14	100	125	160	16	2	4-18	F05/F07
DN65 2-1/2"	64	220	265	106.8	17	17	120	145	185	18	2	4-18	F07/F10
DN80 3"	78	250	265	116.0	17	17	135	160	195	20	2	8-18	F07/F10
DN100 4"	100	280	325	154.5	17	17	156	180	215	20	2	8-18	F07/F10

1/2"~4" Class150

SIZE	D	L	E	H	H1	C	D1	D2	D3	T	F	M-N	ISO5211
DN15 1/2"	15	108	112	48	9	9	35.0	60.5	89.0	10.5	1.6	4-16	F03/F04
DN20 3/4"	20	117	112	62	9	9	43.0	70.0	98.6	10.5	1.6	4-16	F03/F04
DN25 1"	25	127	136	64	11	11	51.0	79.2	108.0	10.5	1.6	4-16	F04/F05
DN32 1-1/4"	32	140	185	71	11	11	63.5	88.9	117.5	11.2	1.6	4-16	F04/F05
DN40 1-1/2"	38	165	198	76	14	14	73.2	98.6	127.0	12.7	1.6	4-16	F05/F07
DN50 2"	50	178	198	84.5	14	14	92.0	120.7	152.5	14.3	1.6	4-19	F05/F07
DN65 2-1/2"	64	190	265	106.8	17	17	104.7	139.7	177.8	15.9	1.6	4-19	F07/F10
DN80 3"	78	203	265	116.0	17	17	127.0	152.4	190.5	17.5	1.6	4-19	F07/F10
DN100 4"	100	229	325	154.5	17	17	157.2	190.5	228.6	22.3	1.6	8-19	F07/F10

10K 15A-100A

SIZE	D	L	E	H	H1	C	D1	D2	D3	T	F	M-N	ISO5211
DN15 1/2"	15	108.0	112	48	9	9	51	70	95	12	1	4-15	F03/F04
DN20 3/4"	20	117.0	112	62	9	9	56	75	100	14	1	4-15	F03/F04
DN25 1"	25	127.0	136	64	11	9	67	90	125	14	1	4-19	F04/F05
DN32 1-1/4"	32	140.0	185	71	11	9	76	100	135	16	2	4-19	F04/F05
DN40 1-1/2"	38	165.0	198	76	14	14	81	105	140	16	2	4-19	F05/F07
DN50 2"	50	178.0	198	84.5	14	14	96	120	155	16	2	4-19	F05/F07
DN65 2-1/2"	64	190.0	265	106.8	17	17	116	140	175	18	2	4-19	F07/F10
DN80 3"	78	203.0	265	116.0	17	17	126	150	185	18	2	8-19	F07/F10
DN100 4"	100	229.0	325	154.5	17	17	151	175	210	18	2	8-19	F07/F10

DN15-DN50 PN16/40, DN65-DN100 PN16


SIZE	D	L	E	H	H1	C	D1	D2	D3	T	F	M-N	ISO5211
DN15 1/2"	15	115	112	48	9	9	45	65	95	14	2	4-14	F03/F04
DN20 3/4"	20	120	112	62	9	9	58	75	105	16	2	4-14	F03/F04
DN25 1"	25	125	136	64	11	9	68	85	115	16	2	4-14	F04/F05
DN32 1-1/4"	32	130	185	71	11	9	78	100	140	16	2	4-18	F04/F05
DN40 1-1/2"	38	140	198	76	14	14	88	110	150	16	2	4-18	F05/F07
DN50 2"	50	150	198	84.5	14	14	102	125	165	16	2	4-18	F05/F07
DN65 2-1/2"	64	170	265	106.8	17	17	122	145	185	16	2	4-18	F07/F10
DN80 3"	78	180	265	116.0	17	17	138	160	200	18	2	8-18	F07/F10
DN100 4"	100	190	325	154.5	17	17	158	180	200	18	2	8-18	F07/F10

D-3FD GB-PN16/40(国标法兰)

- 防爆阀杆/全通径BLOW-OUT PROOF STEM/FULL PORT
- 适用温度范围TEMPERATURE RANGE: -20 to 180°C
- 设计制造DESIGN: GB/T-12237
- 法兰尺寸参照FLANGE DIMENSIONS: GB/ T-9113.1
- 法兰长度FACE TO FACE: GB/T-12221
- 检查与测试TEST: GB/T-13927

D-3FD CLASS 150#

- 防爆阀杆/全通径 BLOW-OUT PROOF STEM/FULL PORT
- 适用温度范围 TEMPERATURE RANGE: -20 to 180°C
- 设计制造 DESIGN: ANSI B16.34
- 法兰尺寸参照 FLANGE DIMENSIONS: ASME B16.5 CLASS150
- 法兰长度 FACE TO FACE: ASME B16.1
- 检查与测试 TEST:API-598
Pressure test:API598

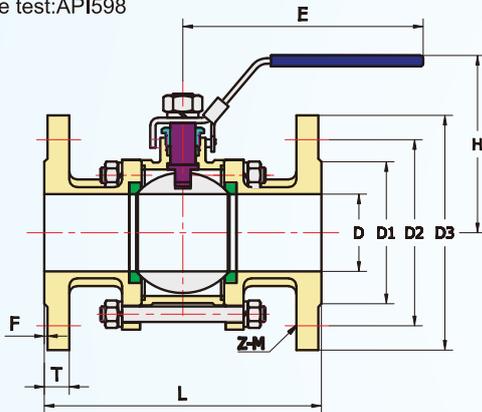

D-3FD JIS-10K

- 防爆阀杆/全通径BLOW-OUT PROOF STEM/FULL PORT
- 适用温度范围TEMPERATURE RANGE: -20 to 180°C
- 设计制造DESIGN: ANSI B16.34
- 法兰尺寸参照FLANGE DIMENSIONS: JIS B2238 10K
- 法兰长度FACE TO FACE: JIS B2002(ASME B16.1)
- 检查与测试TEST: API-598

D-3FD DIN PN16/40

- 防爆阀杆/全通径 BLOW-OUT PROOF STEM/FULL PORT
- 适用温度范围 TEMPERATURE RANGE: -20 to 180°C
- 设计制造 DESIGN: EN12516-1
- 法兰尺寸参照 FLANGE DIMENSIONS:
EN 1092-1 TYPE 21 PN16/40(RF SF)
- 法兰长度 FACE TO FACE: EN 558-1F4/F5(DIN 3202 F4/F5)
- 检查与测试 TEST: EN-12266-1



外形尺寸 OUTER SIZE

Unit:mm

SIZE	D	L-PN16	L-150LB	L-10K	L-PN40	E	H
DN15 1/2"	15	130	108	108	115	132	72
DN20 3/4"	20	140	117	117	120	132	72
DN25 1"	25	150	127	127	125	170	88
DN32 1-1/4"	32	165	140	140	130	170	92
DN40 1-1/2"	38	180	165	165	140	230	125
DN50 2"	50	200	178	178	150	230	136
DN65 2-1/2"	64	220	190	190	170	230	155
DN80 3"	78	250	203	203	180	300	163
DN100 4"	100	280	229	229	190	300	178