

A27H-10、A27H- $\frac{16}{25}$ C、A27Y- $\frac{16}{25}$ P/R型 弹簧微启式安全阀 Spring low lift safety valve

● 用途:


A27H型适用于工作温度 $\leq 200^{\circ}\text{C}$ 的水、空气、蒸气等介质的设备和管路上。A27Y-P/R适用于工作温度 $\leq 200^{\circ}\text{C}$ 有腐蚀性介质设备或管路上，作为超压保护装置。

● Use:

A27H type are used for the equipment and pipelines with such media as water, air and steam at a working temperature less than 200°C . A27Y-P/R type are used for the equipment and pipelines containing corrosive media at a working temperature less than 200°C . They function as an overpressure protection device.

● 主要连接尺寸 Main Connection Dimensions

公称通径 Nominal DN (mm) Diameter	尺寸 Dimension					
	d_o	R	L	L_1	G	$\approx H$
15	10	1/2"	40	65	1/2"	135
20	15	3/4"	45	65	3/4"	140
25	20	1"	45	76	1"	155
32	25	1 1/4"	55	85	1 1/4"	170
40	32	1 1/2"	60	90	1 1/2"	310
50	40	2"	67	105	2"	322
65	50	2 1/2"	76	115	2 1/2"	344
80	65	3"	110	145	3"	395

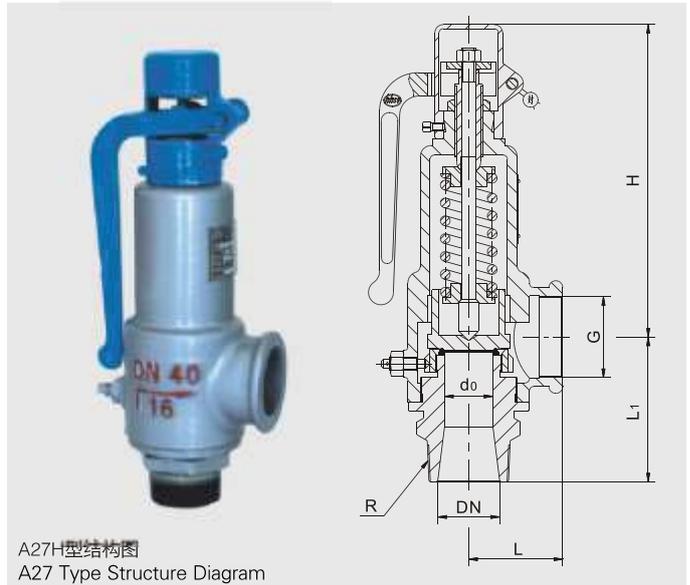

A28H-10、A28H- $\frac{16}{25}$ C、A28Y- $\frac{16}{25}$ P/R型 带手柄弹簧全启式安全阀 Spring fall lift safety valve with handle

● 用途:

A28H/Y型适用于工作温度 $\leq 200^{\circ}\text{C}$ 的空气、蒸气、水、氮氢混合气体等介质的设备和管路上。A28Y-P/R适用于工作温度 $\leq 200^{\circ}\text{C}$ 有腐蚀性介质设备或管路上，作为超压保护装置。

● Use:

A28H/Y type are used for the equipment and pipelines with such media as of air, vapour, water and $\text{N}_2\text{-H}_2$ mixed gas at a working temperature less than 200°C . A28Y-P/R type are used for the equipment and pipelines containing corrosive media at a working temperature less than 200°C . They function as an overpressure protection device.

● 主要连接尺寸 Main Connection Dimensions

公称通径 Nominal DN (mm) Diameter	尺寸 Dimension					
	d_o	R	G	L	L_1	$\approx H$
15	10	1/2"	3/4"	37	65	196
20	12	3/4"	1"	40	70	215
25	15	1"	1 1/4"	45	78	210
32	20	1 1/4"	1 1/2"	60	90	304
40	25	1 1/2"	2"	67	105	325
50	32	2"	2 1/2"	76	115	346
65	40	2 1/2"	3"	110	145	372

