

H76型对夹双瓣式止回阀 H76 Dual-plate Wafer Check Valve




对夹止回阀

Wafer Type Check Valves



H76H型对夹双瓣式止回阀(美标) API Dual-Plate Wafer Check Valve

ASME B16.5

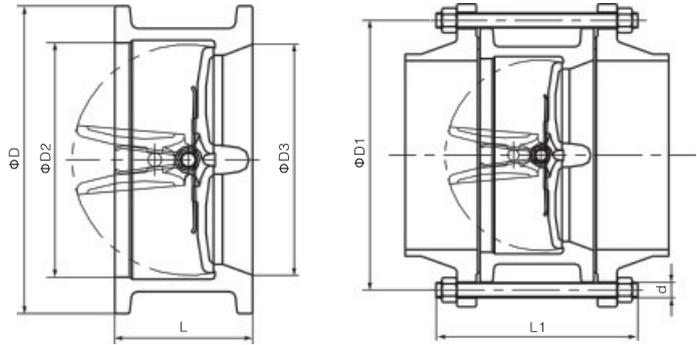

尺寸及重量 (Dimensions & Weights)

| 口径 Size | 压力等级 Pressure Rating | 连接端 End facing | 尺寸 Dimensions | | | | 配管法兰 Pipe Flange | | | | | 重量 Weight (Kg) |
|----------------|----------------------------|-------------------|---------------|-----|-----|-----|------------------|--------------------------|------------------------|-------|-----------------------|----------------------|
| | | | L | D | D3 | D2 | D1 | 螺栓数量 Stud Quantity | 螺栓直径d Stud Diameter | | 螺栓长度L1 Stud Length | |
| | | | mm | | | | | | in | mm | | |
| 2" (50) | 150 | RF | 60 | 103 | 51 | 58 | 120.7 | 4 | 5/8 | M16 | 140 | 2 |
| | 300 | RF | 60 | 110 | 51 | 58 | 127 | 8 | 5/8 | M16 | 155 | 3 |
| | 600 | RF/RTJ-23 | 60 | 110 | 51 | 58 | 127 | 8 | 5/8 | M16 | 175/180 | 3 |
| | 900 | RF/RTJ-24 | 70 | 140 | 50 | 55 | 165.1 | 8 | 7/8 | M24 | 225/230 | 8 |
| | 1500 | RF/RTJ-24 | 70 | 140 | 50 | 55 | 165.1 | 8 | 7/8 | M24 | 225/230 | 8 |
| | 2500 | RF/RTJ-26 | 70 | 143 | 45 | 50 | 171.4 | 8 | 1 | M27 | 255/260 | 9 |
| 2 1/2" (65) | 150 | RF | 67 | 122 | 65 | 73 | 139.7 | 4 | 5/8 | M16 | 150 | 3 |
| | 300 | RF | 67 | 128 | 65 | 73 | 149.2 | 8 | 3/4 | M20 | 175 | 4 |
| | 600 | RF/RTJ-26 | 67 | 128 | 65 | 73 | 149.2 | 8 | 3/4 | M20 | 195/200 | 5 |
| | 900 | RF/RTJ-27 | 83 | 162 | 62 | 70 | 190.5 | 8 | 1 | M27 | 250/255 | 11 |
| | 1500 | RF/RTJ-27 | 83 | 162 | 62 | 70 | 190.5 | 8 | 1 1/8 | M30 | 250/255 | 11 |
| | 2500 | RF/RTJ-28 | 83 | 166 | 52 | 60 | 196.8 | 8 | 1 1/4 | M33 | 290/310 | 13 |
| 3" (80) | 150 | RF | 73 | 135 | 80 | 88 | 152.4 | 4 | 5/8 | M16 | 160 | 4 |
| | 300 | RF | 73 | 147 | 80 | 88 | 168.3 | 8 | 3/4 | M20 | 190 | 6 |
| | 600 | RF/RTJ-31 | 73 | 147 | 80 | 88 | 168.3 | 8 | 3/4 | M20 | 210/215 | 7 |
| | 900 | RF/RTJ-31 | 83 | 165 | 76 | 88 | 190.5 | 8 | 7/8 | M24 | 240/245 | 12 |
| | 1500 | RF/RTJ-35 | 83 | 172 | 76 | 88 | 203.2 | 8 | 1 1/8 | M30 | 270/275 | 13 |
| | 2500 | RF/RTJ-32 | 86 | 194 | 65 | 85 | 228.6 | 8 | 1 1/4 | M33 | 320/330 | 19 |
| 4" (100) | 150 | RF | 73 | 173 | 102 | 108 | 190.5 | 8 | 5/8 | M16 | 170 | 6 |
| | 300 | RF | 73 | 179 | 102 | 108 | 200 | 8 | 3/4 | M20 | 195 | 8 |
| | 600 | RF/RTJ-37 | 79 | 191 | 102 | 108 | 215.9 | 8 | 7/8 | M24 | 235/240 | 11 |
| | 900 | RF/RTJ-37 | 102 | 204 | 100 | 108 | 235 | 8 | 1 1/8 | M30 | 285/290 | 19 |
| | 1500 | RF/RTJ-39 | 102 | 207 | 100 | 108 | 241.3 | 8 | 1 1/4 | M33 | 310/315 | 24 |
| | 2500 | RF/RTJ-38 | 105 | 232 | 90 | 100 | 273 | 8 | 1 1/2 | M39X3 | 370/380 | 32 |
| 5" (125) | 150 | RF | 86 | 195 | 127 | 132 | 215.9 | 8 | 5/8 | M16 | 190 | 9 |
| | 300 | RF | 86 | 214 | 127 | 132 | 235 | 8 | 3/4 | M20 | 215 | 13 |
| | 600 | RF/RTJ-41 | 105 | 239 | 127 | 132 | 292.1 | 8 | 1 | M27 | 280/285 | 20 |
| | 900 | RF/RTJ-41 | 110 | 245 | 125 | 130 | 279.4 | 8 | 1 1/4 | M33 | 310/315 | 33 |
| | 1500 | RF/RTJ-44 | 110 | 252 | 125 | 130 | 292.1 | 8 | 1 1/2 | M39X3 | 370/375 | 35 |
| | 2500 | RF/RTJ-42 | 110 | 277 | 110 | 120 | 323.8 | 8 | 1 3/4 | M45X3 | 420/435 | 47 |
| 6" (150) | 150 | RF | 98 | 220 | 152 | 160 | 241.3 | 8 | 3/4 | M20 | 205 | 9 |
| | 300 | RF | 98 | 249 | 152 | 160 | 269.9 | 12 | 3/4 | M20 | 230 | 13 |
| | 600 | RF/RTJ-45 | 136 | 265 | 152 | 160 | 292.1 | 12 | 1 | M27 | 320/325 | 30 |
| | 900 | RF/RTJ-45 | 159 | 286 | 150 | 160 | 317.5 | 12 | 1 1/8 | M30 | 365/370 | 48 |
| | 1500 | RF/RTJ-46 | 159 | 280 | 150 | 160 | 317.5 | 12 | 1 3/8 | M36X3 | 430/440 | 60 |
| | 2500 | RF/RTJ-47 | 159 | 315 | 135 | 150 | 368.3 | 8 | 2 | M52X3 | 515/530 | 86 |
| 8" (200) | 150 | RF | 127 | 277 | 203 | 210 | 298.5 | 8 | 3/4 | M20 | 240 | 24 |
| | 300 | RF | 127 | 305 | 203 | 210 | 330.2 | 12 | 7/8 | M24 | 280 | 32 |
| | 600 | RF/RTJ-49 | 165 | 318 | 200 | 210 | 349.2 | 12 | 1 1/8 | M30 | 370/375 | 55 |
| | 900 | RF/RTJ-49 | 206 | 356 | 200 | 210 | 393.7 | 12 | 1 3/8 | M36X3 | 440/445 | 85 |
| | 1500 | RF/RTJ-50 | 206 | 350 | 200 | 210 | 393.7 | 12 | 1 5/8 | M42X3 | 510/520 | 130 |
| | 2500 | RF/RTJ-51 | 206 | 385 | 180 | 190 | 438.2 | 12 | 2 | M52X3 | 600/620 | 170 |


对夹止回阀

Wafer Type Check Valves



H76H型对夹双瓣式止回阀(美标) API Dual-Plate Wafer Check Valve

ASME B16.5

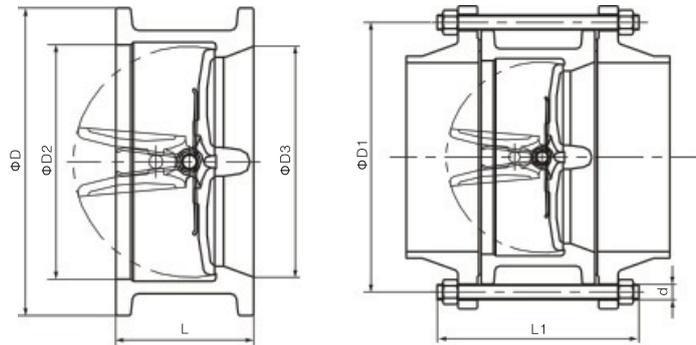

尺寸及重量 (Dimensions & Weights)

| 口径 Size | 压力等级 Pressure Rating | 连接端 End facing | 尺寸 Dimensions | | | | 配管法兰 Pipe Flange | | | | | 重量 Weight (Kg) |
|--------------|----------------------------|-------------------|---------------|-----|-----|-------|------------------|--------------------------|------------------------|---------|-----------------------|----------------------|
| | | | L | D | D3 | D2 | D1 | 螺栓数量 Stud Quantity | 螺栓直径d Stud Diameter | | 螺栓长度L1 Stud Length | |
| | | | mm | | | | | | in | mm | | |
| 10" (250) | 150 | RF | 146 | 337 | 254 | 265 | 362 | 12 | 7/8 | M24 | 270 | 36 |
| | 300 | RF | 146 | 359 | 254 | 265 | 387.4 | 16 | 1 | M27 | 315 | 51 |
| | 600 | RF/RTJ-53 | 213 | 398 | 254 | 265 | 431.8 | 16 | 1 1/4 | M33 | 440/445 | 110 |
| | 900 | RF/RTJ-53 | 241 | 432 | 250 | 265 | 469.9 | 16 | 1 3/8 | M36X3 | 490/495 | 180 |
| | 1500 | RF/RTJ-54 | 248 | 433 | 240 | 260 | 482.6 | 12 | 1 7/8 | M48X3 | 600/610 | 220 |
| 2500 | RF/RTJ-55 | 254 | 474 | 225 | 235 | 539.8 | 12 | 2 1/2 | M64X3 | 750/775 | 240 | |
| 12" (300) | 150 | RF | 181 | 407 | 305 | 310 | 431.8 | 12 | 7/8 | M24 | 310 | 60 |
| | 300 | RF | 181 | 420 | 305 | 310 | 450.8 | 16 | 1 1/8 | M30 | 365 | 78 |
| | 600 | RF/RTJ-57 | 229 | 455 | 305 | 310 | 489 | 20 | 1 1/4 | M33 | 460/465 | 150 |
| | 900 | RF/RTJ-57 | 292 | 495 | 300 | 305 | 533.4 | 20 | 1 3/8 | M36X3 | 560/565 | 270 |
| | 1500 | RF/RTJ-58 | 305 | 518 | 300 | 305 | 571.5 | 16 | 2 | M52X3 | 690/715 | 390 |
| 2500 | RF/RTJ-60 | 305 | 547 | 270 | 280 | 619 | 12 | 2 3/4 | M70X3 | 855/885 | 450 | |
| 14" (350) | 150 | RF | 184 | 448 | 350 | 355 | 476.3 | 12 | 1 | M27 | 325 | 85 |
| | 300 | RF | 222 | 483 | 350 | 355 | 514.4 | 20 | 1 1/8 | M30 | 410 | 135 |
| | 600 | RF/RTJ-61 | 273 | 490 | 340 | 350 | 527 | 20 | 1 3/8 | M36X3 | 520/525 | 215 |
| | 900 | RF/RTJ-62 | 356 | 518 | 340 | 350 | 558.8 | 20 | 1 1/2 | M39X3 | 645/655 | 350 |
| | 1500 | RF/RTJ-63 | 356 | 576 | 330 | 340 | 635 | 16 | 2 1/4 | M56X3 | 775/800 | 570 |
| 16" (400) | 150 | RF | 191 | 512 | 400 | 405 | 539.8 | 16 | 1 | M27 | 340 | 120 |
| | 300 | RF | 232 | 537 | 400 | 405 | 571.5 | 20 | 1 1/4 | M33 | 435 | 185 |
| | 600 | RF/RTJ-65 | 305 | 562 | 390 | 400 | 603.2 | 20 | 1 1/2 | M39X3 | 575/580 | 320 |
| | 900 | RF/RTJ-66 | 384 | 572 | 380 | 400 | 616 | 20 | 1 5/8 | M42X3 | 685/695 | 470 |
| | 1500 | RF/RTJ-67 | 384 | 639 | 370 | 390 | 704.8 | 16 | 2 1/2 | M64X3 | 850/880 | 750 |
| 18" (450) | 150 | RF | 203 | 547 | 450 | 455 | 577.9 | 16 | 1 1/8 | M30 | 365 | 140 |
| | 300 | RF | 264 | 594 | 450 | 455 | 628.6 | 24 | 1 1/4 | M33 | 475 | 230 |
| | 600 | RF/RTJ-69 | 362 | 610 | 440 | 450 | 654 | 20 | 1 5/8 | M42X3 | 650/655 | 390 |
| | 900 | RF/RTJ-70 | 451 | 635 | 430 | 440 | 685.8 | 20 | 1 7/8 | M48X3 | 790/805 | 605 |
| | 1500 | RF/RTJ-71 | 468 | 701 | 420 | 440 | 774.7 | 16 | 2 3/4 | M70X3 | 955/985 | 1000 |
| 20" (500) | 150 | RF | 219 | 604 | 500 | 505 | 635 | 20 | 1 1/8 | M30 | 365 | 160 |
| | 300 | RF | 292 | 652 | 500 | 505 | 685.8 | 24 | 1 1/4 | M33 | 510 | 300 |
| | 600 | RF/RTJ-73 | 368 | 680 | 490 | 500 | 723.9 | 24 | 1 5/8 | M42X3 | 670/680 | 520 |
| | 900 | RF/RTJ-74 | 451 | 695 | 490 | 500 | 749.3 | 20 | 2 | M52X3 | 810/825 | 820 |
| | 1500 | RF/RTJ-75 | 533 | 752 | 460 | 480 | 831.8 | 16 | 3 | M76X3 | 1065/1095 | 1280 |
| 24" (600) | 150 | RF | 222 | 715 | 600 | 605 | 749.3 | 20 | 1 1/4 | M33 | 405 | 250 |
| | 300 | RF | 318 | 772 | 600 | 605 | 812.8 | 24 | 1 1/2 | M39X3 | 560 | 430 |
| | 600 | RF/RTJ-77 | 438 | 786 | 590 | 600 | 838.2 | 24 | 1 7/8 | M48X3 | 780/795 | 780 |
| | 900 | RF/RTJ-78 | 495 | 835 | 580 | 590 | 901.7 | 20 | 2 1/2 | M64X3 | 945/965 | 1050 |
| | 1500 | RF/RTJ-79 | 559 | 898 | 560 | 570 | 990.6 | 16 | 3 1/2 | M90X3 | 1170/1210 | 1950 |

以上尺寸仅供参考。The above dimensions are for reference only.

| 口径 Size | 2"-24" | 26"-60" | 66"-144" |
|-------------|------------|----------------------------|-------------------------------|
| 法兰标准 FlgStd | ASME B16.5 | ASME B16.47 A (MSS SP44) | AWWA C207 (Class E 275 PSI) |

对夹止回阀


Wafer Type Check Valves



H76H型对夹双瓣式止回阀(美标)

API Dual-Plate Wafer Check Valve

ASME B16.47 A

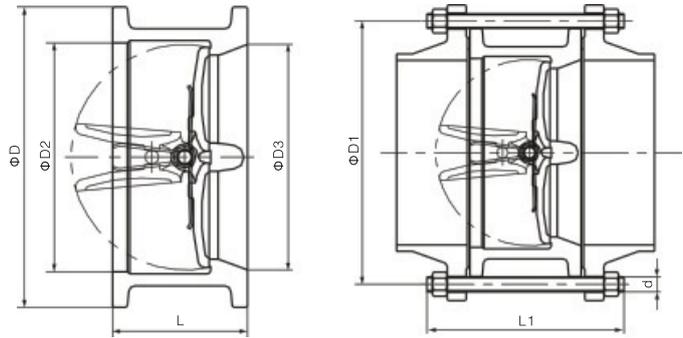

尺寸及重量 (Dimensions & Weights)

| 口径 Size | 压力等级 Pressure Rating | 连接端 End facing | 尺寸 Dimensions | | | | 配管法兰 Pipe Flange | | | | | 重量 Weight (Kg) |
|-------------------------|----------------------------|-------------------|---------------|------|------|------|------------------|--------------------------|------------------------|-------|-----------------------|----------------------|
| | | | L | D | D3 | D2 | D1 | 螺栓数量 Stud Quantity | 螺栓直径d Stud Diameter | | 螺栓长度L1 Stud Length | |
| | | | | | | | | | in | mm | | |
| 28" (700) | 150 | RF | 305 | 827 | 685 | 690 | 863.6 | 28 | 1 1/4 | M33 | 545 | 390 |
| | 300 | RF | 368 | 895 | 685 | 690 | 939.8 | 28 | 1 5/8 | M42X3 | 650 | 680 |
| | 600 | RF/RTJ-94 | 483 | 910 | 685 | 690 | 965.2 | 28 | 2 | M52X3 | 850/865 | 1250 |
| | 900 | RF/RTJ-101 | 572 | 943 | 670 | 680 | 1022.4 | 20 | 3 | M76X3 | 1080/1100 | 1700 |
| 30" (750) | 150 | RF | 305 | 878 | 740 | 740 | 914.4 | 28 | 1 1/4 | M33 | 550 | 440 |
| | 300 | RF | 368 | 949 | 735 | 740 | 997 | 28 | 1 3/4 | M45X3 | 665 | 700 |
| | 600 | RF/RTJ-95 | 505 | 967 | 735 | 740 | 1022.4 | 28 | 2 | M52X3 | 890/905 | 1550 |
| | 900 | RF/RTJ-102 | 635 | 1006 | 715 | 730 | 1085.9 | 20 | 3 | M76X3 | 1160/1180 | 2000 |
| 32" (800) | 150 | RF | 305 | 935 | 785 | 790 | 977.9 | 28 | 1 1/2 | M39X3 | 570 | 530 |
| | 300 | RF | 368 | 1003 | 785 | 790 | 1054.1 | 28 | 1 7/8 | M48X3 | 685 | 760 |
| | 600 | RF/RTJ-96 | 533 | 1020 | 780 | 790 | 1079.5 | 28 | 2 1/4 | M56X3 | 920/940 | 1800 |
| | 900 | RF/RTJ-103 | 660 | 1070 | 760 | 780 | 1155.7 | 20 | 3 1/4 | M84X3 | 1200/1220 | 2200 |
| 36" (900) | 150 | RF | 368 | 1045 | 885 | 890 | 1085.9 | 32 | 1 1/2 | M39X3 | 650 | 700 |
| | 300 | RF | 483 | 1113 | 885 | 890 | 1168.4 | 32 | 2 | M52X3 | 820 | 1180 |
| | 600 | RF/RTJ-98 | 635 | 1126 | 875 | 880 | 1193.8 | 28 | 2 1/2 | M64X3 | 1050/1070 | 2200 |
| | 900 | RF/RTJ-105 | 718 | 1195 | 855 | 865 | 1289.1 | 20 | 3 1/2 | M90X3 | 1290/1310 | 2800 |
| 40" (1000) | 150 | RF | 432 | 1158 | 980 | 990 | 1200.2 | 36 | 1 1/2 | M39X3 | 720 | 920 |
| | 300 | RF | 546 | 1110 | 980 | 990 | 1155.7 | 32 | 1 5/8 | M45X3 | 885 | 1480 |
| | 600 | RF | 660 | 1153 | 980 | 985 | 1212.9 | 32 | 2 1/4 | M56X3 | 1130 | 2600 |
| | 900 | RF | 762 | 1246 | 950 | 965 | 1339.9 | 24 | 3 1/2 | M90X3 | 1380 | 3200 |
| 42" (1050) | 150 | RF | 432 | 1213 | 1020 | 1040 | 1257.3 | 36 | 1 1/2 | M39X3 | 730 | 980 |
| | 300 | RF | 568 | 1161 | 1020 | 1040 | 1206.5 | 32 | 1 5/8 | M45X3 | 915 | 1600 |
| | 600 | RF | 702 | 1215 | 1020 | 1030 | 1282.7 | 28 | 2 1/2 | M64X3 | 1210 | 2900 |
| | 900 | RF | 787 | 1296 | 995 | 1005 | 1390.7 | 24 | 3 1/2 | M90X3 | 1440 | 3540 |
| 48" (1200) | 150 | RF | 524 | 1397 | 1170 | 1080 | 1422.4 | 44 | 1 1/2 | M39X3 | 840 | 1580 |
| | 300 | RF | 629 | 1320 | 1170 | 1180 | 1371.6 | 32 | 1 7/8 | M48X3 | 1015 | 2250 |
| | 600 | RF | 787 | 1386 | 1170 | 1170 | 1460.5 | 32 | 2 3/4 | M70X3 | 1350 | 4050 |
| 54" (1350) | 150 | RF | 591 | 1545 | 1315 | 1330 | 1593.9 | 44 | 1 3/4 | M42X3 | 950 | 2480 |
| | 300 | RF | 718 | 1489 | 1315 | 1330 | 1549.4 | 28 | 2 1/4 | M56X3 | 1160 | 3200 |
| 60" (1500) | 150 | RF | 660 | 1710 | 1460 | 1470 | 1759 | 52 | 1 3/4 | M42X3 | 1040 | 3500 |
| | 300 | RF | 838 | 1642 | 1460 | 1470 | 1701.8 | 32 | 2 1/4 | M56X3 | 1310 | 4800 |
| 66" (1650) | 150 | RF | 787 | 1881 | 1630 | 1640 | 1930.4 | 52 | 1 3/4 | M45X3 | 1080 | ** |
| 72" (1800) | 150 | RF | 851 | 2046 | 1780 | 1790 | 2095.5 | 60 | 1 3/4 | M45X3 | 1150 | ** |
| 78" (1950) | 150 | RF | 927 | 2204 | 1930 | 1940 | 2260.6 | 64 | 2 | M52X3 | 1250 | ** |
| 84" (2100) | 150 | RF | 1041 | 2369 | 2080 | 2090 | 2425.7 | 64 | 2 | M52X3 | 1370 | ** |
| 90"-144" (2250-3600) | 150 | RF | ** | ** | ** | ** | ** | ** | ** | ** | ** | ** |


对夹止回阀

Wafer Type Check Valves



H76H型对夹双瓣式止回阀(美标) API Dual-Plate Wafer Check Valve

ASME B16.47 B

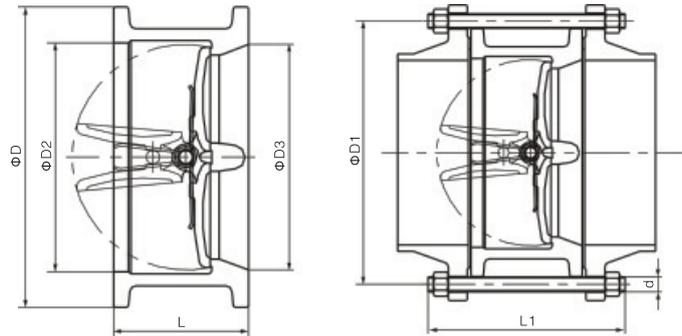

尺寸及重量 (Dimensions & Weights)

| 口径 Size | 压力等级 Pressure Rating | 连接端 End facing | 尺寸 Dimensions | | | | 配管法兰 Pipe Flange | | | | 重量 Weight (Kg) | |
|---------------|----------------------------|-------------------|---------------|------|------|------|------------------|--------------------------|------------------------|-------|----------------------|-----------------------|
| | | | L | D | D3 | D2 | D1 | 螺栓数量 Stud Quantity | 螺栓直径d Stud Diameter | | | 螺栓长度L1 Stud Length |
| | | | | | | | | | in | mm | | |
| 28" (700) | 150 | RF | 305 | 773 | 685 | 690 | 795.2 | 40 | 3/4 | M20 | 460 | 350 |
| | 300 | RF | 368 | 821 | 685 | 690 | 857.2 | 36 | 1 1/4 | M33 | 640 | 600 |
| | 600 | RF/RTJ-94 | 483 | 815 | 685 | 690 | 863.6 | 28 | 1 3/4 | M45X3 | 850/870 | 1000 |
| | 900 | RF/RTJ-101 | 572 | 898 | 670 | 680 | 971.6 | 20 | 2 3/4 | M70X3 | 1070/1090 | 1400 |
| 30" (750) | 150 | RF | 305 | 824 | 740 | 740 | 846.1 | 44 | 3/4 | M20 | 460 | 400 |
| | 300 | RF | 368 | 882 | 735 | 740 | 920.8 | 36 | 1 3/8 | M36X3 | 675 | 630 |
| | 600 | RF/RTJ-95 | 505 | 875 | 735 | 740 | 927.1 | 28 | 1 7/8 | M48X3 | 900/920 | 1280 |
| | 900 | RF/RTJ-102 | 635 | 955 | 715 | 730 | 1035.0 | 20 | 3 | M76X3 | 1150/1170 | 1700 |
| 32" (800) | 150 | RF | 305 | 878 | 790 | 790 | 900.2 | 48 | 3/4 | M20 | 470 | 450 |
| | 300 | RF | 368 | 936 | 790 | 790 | 977.9 | 32 | 1 1/2 | M39X3 | 680 | 680 |
| | 600 | RF/RTJ-96 | 533 | 928 | 780 | 790 | 984.3 | 28 | 2 | M52X3 | 940/960 | 1500 |
| | 900 | RF/RTJ-103 | 660 | 1012 | 760 | 780 | 1092.2 | 20 | 3 | M76X3 | 1180/1200 | 1800 |
| 36" (900) | 150 | RF | 368 | 983 | 890 | 890 | 1009.7 | 44 | 7/8 | M24 | 550 | 620 |
| | 300 | RF | 483 | 1044 | 880 | 890 | 1089 | 32 | 1 5/8 | M42X3 | 810 | 1080 |
| | 600 | RF/RTJ-98 | 635 | 1045 | 875 | 880 | 1104.9 | 28 | 2 1/4 | M56X3 | 1090/1110 | 1900 |
| | 900 | RF/RTJ-105 | 718 | 1120 | 855 | 865 | 1200.2 | 24 | 3 | M76X3 | 1260/1280 | 2400 |
| 40" (1000) | 150 | RF | 432 | 1090 | 990 | 990 | 1120.6 | 44 | 1 | M27 | 630 | 820 |
| | 300 | RF | 546 | 1146 | 980 | 990 | 1190.8 | 40 | 1 5/8 | M42X3 | 810 | 1300 |
| 42" (1050) | 150 | RF | 432 | 1142 | 1020 | 1040 | 1171.4 | 48 | 1 | M27 | 635 | 880 |
| | 300 | RF | 568 | 1196 | 1020 | 1040 | 1244.6 | 36 | 1 3/4 | M45X3 | 940 | 1450 |
| 48" (1200) | 150 | RF | 524 | 1302 | 1170 | 1180 | 1335 | 44 | 1 1/8 | M30 | 840 | 1420 |
| | 300 | RF | 629 | 1365 | 1170 | 1180 | 1416.1 | 40 | 1 7/8 | M48X3 | 1020 | 2030 |
| 54" (1350) | 150 | RF | 591 | 1460 | 1315 | 1330 | 1492.3 | 56 | 1 1/8 | M30 | 950 | 2230 |
| | 300 | RF | 718 | 1526 | 1315 | 1330 | 1577.8 | 48 | 1 7/8 | M48X3 | 1130 | 2900 |
| 60" (1500) | 150 | RF | 660 | 1628 | 1460 | 1470 | 1662.2 | 52 | 1 1/4 | M33 | 1040 | 3150 |
| | 300 | RF | 838 | 1704 | 1460 | 1470 | 1763.7 | 40 | 2 1/4 | M56X3 | 1300 | 4300 |




对夹止回阀

Wafer Type Check Valves



H76H型对夹双瓣式止回阀(国标) GB Dual-Plate Wafer Check Valve

GB/T 9113

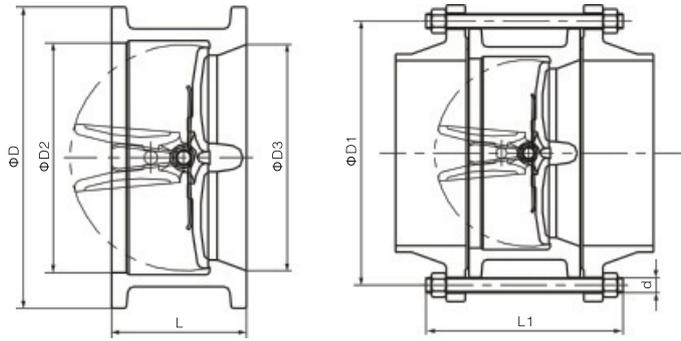

尺寸及重量 (Dimensions & Weights)


| 口径 Size | 压力等级 Pressure Rating | 连接端 End facing | 尺寸 Dimensions | | | | 配管法兰 Pipe Flange | | | | | 重量 Weight (Kg) |
|------------|----------------------------|-------------------|---------------|-----|-----|-----|------------------|--------------------------|------------------------|-----|-----------------------|----------------------|
| | | | L | D | D3 | D2 | D1 | 螺栓数量 Stud Quantity | 螺栓直径d Stud Diameter | | 螺栓长度L1 Stud Length | |
| | | | mm | | | | | | in | mm | | |
| DN50 | PN10 | RF | 60 | 108 | 51 | 58 | 125 | 4 | ** | M16 | 150 | 2 |
| | PN16 | RF | 60 | 108 | 51 | 58 | 125 | 4 | ** | M16 | 150 | 2 |
| | PN25 | RF | 60 | 108 | 51 | 58 | 125 | 4 | ** | M16 | 150 | 2 |
| | PN40 | RF/MFM | 60 | 108 | 51 | 58 | 125 | 4 | ** | M16 | 150 | 3 |
| | PN63 | RF/MFM/RJ | 60 | 114 | 51 | 58 | 135 | 4 | ** | M20 | 170/185 | 4 |
| | PN100 | RF/MFM/RJ | 60 | 120 | 51 | 58 | 145 | 4 | ** | M24 | 185/200 | 5 |
| DN65 | PN10 | RF | 67 | 128 | 65 | 73 | 145 | 4 | ** | M16 | 155 | 3 |
| | PN16 | RF | 67 | 128 | 65 | 73 | 145 | 4 | ** | M16 | 155 | 3 |
| | PN25 | RF | 67 | 128 | 65 | 73 | 145 | 8 | ** | M16 | 160 | 3 |
| | PN40 | RF/MFM | 67 | 128 | 65 | 73 | 145 | 8 | ** | M16 | 160 | 4 |
| | PN63 | RF/MFM/RJ | 67 | 138 | 65 | 73 | 160 | 8 | ** | M20 | 180/195 | 5 |
| | PN100 | RF/MFM/RJ | 67 | 144 | 65 | 73 | 170 | 8 | ** | M24 | 195/210 | 7 |
| DN80 | PN10 | RF | 73 | 142 | 80 | 88 | 160 | 8 | ** | M16 | 160 | 4 |
| | PN16 | RF | 73 | 142 | 80 | 88 | 160 | 8 | ** | M16 | 160 | 4 |
| | PN25 | RF | 73 | 142 | 80 | 88 | 160 | 8 | ** | M16 | 170 | 4 |
| | PN40 | RF/MFM | 73 | 142 | 80 | 88 | 160 | 8 | ** | M16 | 170 | 6 |
| | PN63 | RF/MFM/RJ | 73 | 148 | 80 | 88 | 170 | 8 | ** | M20 | 190/205 | 8 |
| | PN100 | RF/MFM/RJ | 73 | 154 | 80 | 88 | 180 | 8 | ** | M24 | 205/220 | 10 |
| DN100 | PN10 | RF | 73 | 162 | 102 | 108 | 180 | 8 | ** | M16 | 165 | 6 |
| | PN16 | RF | 73 | 162 | 102 | 108 | 180 | 8 | ** | M16 | 165 | 6 |
| | PN25 | RF | 73 | 168 | 102 | 108 | 190 | 8 | ** | M20 | 180 | 7 |
| | PN40 | RF/MFM | 73 | 168 | 102 | 108 | 190 | 8 | ** | M20 | 180 | 8 |
| | PN63 | RF/MFM/RJ | 79 | 174 | 102 | 108 | 200 | 8 | ** | M24 | 210/225 | 10 |
| | PN100 | RF/MFM/RJ | 79 | 181 | 102 | 108 | 210 | 8 | ** | M27 | 225/240 | 12 |
| DN125 | PN10 | RF | 86 | 192 | 127 | 132 | 210 | 8 | ** | M16 | 180 | 9 |
| | PN16 | RF | 86 | 192 | 127 | 132 | 210 | 8 | ** | M16 | 180 | 9 |
| | PN25 | RF | 86 | 194 | 127 | 132 | 220 | 8 | ** | M24 | 205 | 10 |
| | PN40 | RF/MFM | 86 | 194 | 127 | 132 | 220 | 8 | ** | M24 | 205 | 12 |
| | PN63 | RF/MFM/RJ | 105 | 211 | 127 | 132 | 240 | 8 | ** | M27 | 250/265 | 16 |
| | PN100 | RF/MFM/RJ | 105 | 218 | 127 | 132 | 250 | 8 | ** | M30 | 265/280 | 19 |
| DN150 | PN10 | RF | 98 | 218 | 152 | 160 | 240 | 8 | ** | M20 | 205 | 13 |
| | PN16 | RF | 98 | 218 | 152 | 160 | 240 | 8 | ** | M20 | 205 | 13 |
| | PN25 | RF | 98 | 224 | 152 | 160 | 250 | 8 | ** | M24 | 220 | 14 |
| | PN40 | RF/MFM | 98 | 224 | 152 | 160 | 250 | 8 | ** | M24 | 220 | 18 |
| | PN63 | RF/MFM/RJ | 136 | 248 | 152 | 160 | 280 | 8 | ** | M30 | 290/305 | 25 |
| | PN100 | RF/MFM/RJ | 136 | 258 | 152 | 160 | 290 | 12 | ** | M30 | 305/320 | 28 |
| DN200 | PN10 | RF | 127 | 273 | 203 | 210 | 295 | 8 | ** | M20 | 235 | 23 |
| | PN16 | RF | 127 | 273 | 203 | 210 | 295 | 12 | ** | M20 | 235 | 23 |
| | PN25 | RF | 127 | 284 | 203 | 210 | 310 | 12 | ** | M24 | 255 | 25 |
| | PN40 | RF/MFM | 127 | 291 | 203 | 210 | 320 | 12 | ** | M27 | 270 | 31 |
| | PN63 | RF/MFM/RJ | 165 | 310 | 203 | 210 | 345 | 12 | ** | M33 | 335/350 | 52 |
| | PN100 | RF/MFM/RJ | 165 | 324 | 203 | 210 | 360 | 12 | ** | M33 | 355/370 | 57 |

对夹止回阀

Wafer Type Check Valves

H76H型对夹双瓣式止回阀(国标) GB Dual-Plate Wafer Check Valve

GB/T 9113

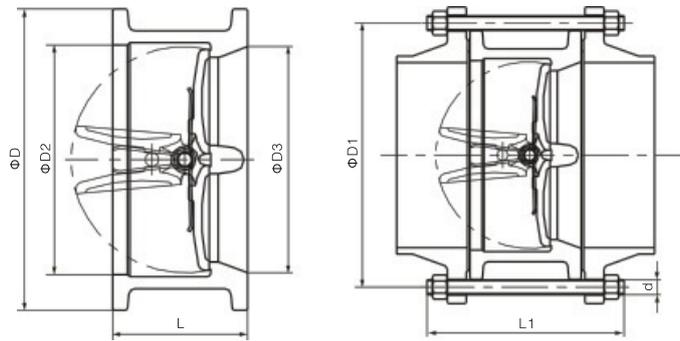

尺寸及重量 (Dimensions & Weights)


| 口径 Size | 压力等级 Pressure Rating | 连接端 End facing | 尺寸 Dimensions | | | | 配管法兰 Pipe Flange | | | | 重量 Weight (Kg) | |
|------------|----------------------------|-------------------|---------------|-----|-----|-----|------------------|--------------------------|------------------------|-------|----------------------|-----------------------|
| | | | L | D | D3 | D2 | D1 | 螺栓数量 Stud Quantity | 螺栓直径d Stud Diameter | | | 螺栓长度L1 Stud Length |
| | | | mm | | | | | | in | mm | | |
| DN250 | PN10 | RF | 146 | 328 | 254 | 265 | 350 | 12 | ** | M24 | 255 | 33 |
| | PN16 | RF | 146 | 329 | 254 | 265 | 355 | 12 | ** | M24 | 260 | 33 |
| | PN25 | RF | 146 | 341 | 254 | 265 | 370 | 12 | ** | M27 | 285 | 38 |
| | PN40 | RF/MFM | 146 | 353 | 254 | 265 | 385 | 12 | ** | M30 | 300 | 49 |
| | PN63 | RF/MFM/RJ | 213 | 362 | 254 | 265 | 400 | 12 | ** | M33 | 395/410 | 90 |
| | PN100 | RF/MFM/RJ | 213 | 392 | 254 | 265 | 430 | 12 | ** | M36X3 | 425/440 | 108 |
| DN300 | PN10 | RF | 181 | 378 | 305 | 310 | 400 | 12 | ** | M20 | 290 | 52 |
| | PN16 | RF | 181 | 384 | 305 | 310 | 410 | 12 | ** | M24 | 305 | 54 |
| | PN25 | RF | 181 | 401 | 305 | 310 | 430 | 16 | ** | M27 | 325 | 60 |
| | PN40 | RF/MFM | 181 | 418 | 305 | 310 | 450 | 16 | ** | M30 | 345 | 76 |
| | PN63 | RF/MFM/RJ | 229 | 422 | 305 | 310 | 460 | 16 | ** | M33 | 420/435 | 120 |
| | PN100 | RF/MFM/RJ | 229 | 456 | 305 | 310 | 500 | 16 | ** | M39X3 | 465/480 | 150 |
| DN350 | PN10 | RF | 184 | 438 | 350 | 355 | 460 | 16 | ** | M20 | 295 | 82 |
| | PN16 | RF | 184 | 444 | 350 | 355 | 470 | 16 | ** | M24 | 310 | 84 |
| | PN25 | RF | 184 | 458 | 350 | 355 | 490 | 16 | ** | M30 | 340 | 90 |
| | PN40 | RF/MFM | 222 | 475 | 350 | 355 | 510 | 20 | ** | M33X3 | 400 | 125 |
| | PN63 | RF/MFM/RJ | 273 | 487 | 340 | 350 | 525 | 16 | ** | M36X3 | 480/495 | 210 |
| | PN100 | RF/MFM/RJ | 273 | 510 | 340 | 350 | 560 | 16 | ** | M45X3 | 535/550 | 230 |
| DN400 | PN10 | RF | 191 | 489 | 400 | 405 | 515 | 16 | ** | M24 | 310 | 110 |
| | PN16 | RF | 191 | 496 | 400 | 405 | 525 | 16 | ** | M27 | 330 | 114 |
| | PN25 | RF | 191 | 515 | 400 | 405 | 550 | 16 | ** | M33 | 360 | 125 |
| | PN40 | RF/MFM | 232 | 547 | 400 | 405 | 585 | 16 | ** | M36X3 | 425 | 190 |
| | PN63 | RF/MFM/RJ | 305 | 541 | 390 | 400 | 585 | 16 | ** | M39X3 | 525/540 | 275 |
| | PN100 | RF/MFM/RJ | 305 | 570 | 390 | 400 | 620 | 16 | ** | M45X3 | 585/600 | 310 |
| DN450 | PN10 | RF | 203 | 539 | 450 | 455 | 565 | 20 | ** | M24 | 325 | 138 |
| | PN16 | RF | 203 | 556 | 450 | 455 | 585 | 20 | ** | M27 | 345 | 145 |
| | PN25 | RF | 203 | 565 | 450 | 455 | 600 | 20 | ** | M33 | 375 | 150 |
| | PN40 | RF/MFM | 264 | 572 | 450 | 455 | 610 | 20 | ** | M36X3 | 470 | 200 |
| DN500 | PN10 | RF | 219 | 594 | 500 | 505 | 635 | 20 | ** | M24 | 365 | 155 |
| | PN16 | RF | 219 | 618 | 500 | 505 | 650 | 20 | ** | M30 | 370 | 165 |
| | PN25 | RF | 219 | 622 | 500 | 505 | 660 | 20 | ** | M33 | 395 | 168 |
| | PN40 | RF/MFM | 292 | 626 | 500 | 505 | 670 | 20 | ** | M39X3 | 505 | 260 |
| DN600 | PN10 | RF | 222 | 696 | 600 | 605 | 725 | 20 | ** | M27 | 355 | 240 |
| | PN16 | RF | 222 | 732 | 600 | 605 | 770 | 20 | ** | M33 | 380 | 260 |
| | PN25 | RF | 222 | 732 | 600 | 605 | 770 | 20 | ** | M36X3 | 410 | 280 |
| | PN40 | RF/MFM | 318 | 745 | 600 | 605 | 795 | 20 | ** | M45X3 | 575 | 405 |
| DN700 | PN10 | RF | 305 | 811 | 685 | 690 | 840 | 24 | ** | M27 | 440 | 385 |
| | PN16 | RF | 305 | 802 | 685 | 690 | 840 | 24 | ** | M33 | 470 | 380 |
| | PN25 | RF | 305 | 831 | 685 | 690 | 990 | 24 | ** | M39X3 | 500 | 400 |
| DN800 | PN10 | RF | 305 | 918 | 785 | 790 | 950 | 24 | ** | M30 | 450 | 520 |
| | PN16 | RF | 305 | 912 | 785 | 790 | 950 | 24 | ** | M36X3 | 475 | 510 |
| | PN25 | RF | 305 | 942 | 785 | 790 | 990 | 24 | ** | M45X3 | 520 | 540 |

对夹止回阀

Wafer Type Check Valves



H76H型对夹双瓣式止回阀 (国标) GB Dual-Plate Wafer Check Valve GB/T 9113

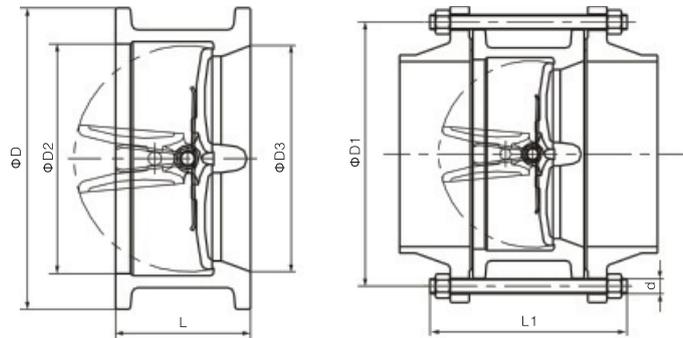

尺寸及重量 (Dimensions & Weights)

| 口径 Size | 压力等级 Pressure Rating | 连接端 End facing | 尺寸 Dimensions | | | | 配管法兰 Pipe Flange | | | | | 重量 Weight (Kg) |
|------------|----------------------------|-------------------|---------------|------|------|------|------------------|--------------------------|------------------------|-------|-----------------------|----------------------|
| | | | L | D | D3 | D2 | D1 | 螺栓数量 Stud Quantity | 螺栓直径d Stud Diameter | | 螺栓长度L1 Stud Length | |
| | | | mm | | | | | | in | mm | | |
| DN900 | PN10 | RF | 368 | 1018 | 885 | 890 | 1050 | 28 | ** | M30 | 520 | 640 |
| | PN16 | RF | 368 | 1012 | 885 | 890 | 1150 | 28 | ** | M36X3 | 545 | 630 |
| | PN25 | RF | 368 | 1040 | 885 | 890 | 1090 | 28 | ** | M45X3 | 590 | 690 |
| DN1000 | PN10 | RF | 432 | 1124 | 980 | 990 | 1160 | 28 | ** | M33 | 590 | 870 |
| | PN16 | RF | 432 | 1126 | 980 | 990 | 1170 | 28 | ** | M39X3 | 620 | 872 |
| | PN25 | RF | 432 | 1155 | 980 | 990 | 1210 | 28 | ** | M52X3 | 675 | 960 |
| DN1200 | PN10 | RF | 524 | 1340 | 1170 | 1190 | 1380 | 32 | ** | M36X3 | 695 | 1500 |
| | PN16 | RF | 524 | 1340 | 1170 | 1190 | 1390 | 32 | ** | M45X3 | 735 | 1500 |
| | PN25 | RF | 524 | 1365 | 1170 | 1190 | 1420 | 32 | ** | M52X3 | 790 | 1550 |
| DN1300 | PN10 | RF | ** | ** | ** | ** | ** | ** | ** | ** | ** | ** |
| | PN16 | RF | ** | ** | ** | ** | ** | ** | ** | ** | ** | ** |
| | PN25 | RF | ** | ** | ** | ** | ** | ** | ** | ** | ** | ** |
| DN1400 | PN10 | RF | ** | ** | ** | ** | ** | ** | ** | ** | ** | ** |
| | PN16 | RF | ** | ** | ** | ** | ** | ** | ** | ** | ** | ** |
| | PN25 | RF | ** | ** | ** | ** | ** | ** | ** | ** | ** | ** |
| DN1500 | PN10 | RF | ** | ** | ** | ** | ** | ** | ** | ** | ** | ** |
| | PN16 | RF | ** | ** | ** | ** | ** | ** | ** | ** | ** | ** |
| | PN25 | RF | ** | ** | ** | ** | ** | ** | ** | ** | ** | ** |
| DN1600 | PN10 | RF | ** | ** | ** | ** | ** | ** | ** | ** | ** | ** |
| | PN16 | RF | ** | ** | ** | ** | ** | ** | ** | ** | ** | ** |
| | PN25 | RF | ** | ** | ** | ** | ** | ** | ** | ** | ** | ** |
| DN1800 | PN10 | RF | ** | ** | ** | ** | ** | ** | ** | ** | ** | ** |
| | PN16 | RF | ** | ** | ** | ** | ** | ** | ** | ** | ** | ** |
| | PN25 | RF | ** | ** | ** | ** | ** | ** | ** | ** | ** | ** |
| DN2000 | PN10 | RF | ** | ** | ** | ** | ** | ** | ** | ** | ** | ** |
| | PN16 | RF | ** | ** | ** | ** | ** | ** | ** | ** | ** | ** |
| | PN25 | RF | ** | ** | ** | ** | ** | ** | ** | ** | ** | ** |

